




CAPACITORS FOR HIGH PULSE APPLICATIONS KPI 313 S



Dimensions:

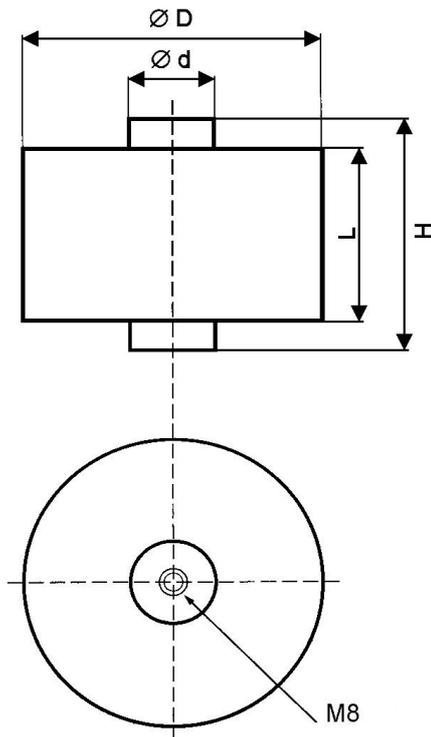

Construction:

Metal-foil electrodes, polypropylene dielectric internal series connection.

Non-inductive, self-healing construction, The windings are enclosed in a cylindrical plastic case, epoxy resin sealed, self-extinguishing, UL94-V0

Mechanical fixing and electrical contact are made by threaded holes M8x8 on the facing of the case.

Applications:

The capacitors are suitable to withstand very high peak current loading. High ripple current, high frequency applications

The axial construction minimizes the series inductance, The capacitors have very low series resistance and good thermal dissipation of heat.

Technical data

Rated voltage U_R Rated voltage is the max. DC or peak voltage, for which the capacitor is designed.

If the capacitor works with the DC and also super-imposed AC voltage, the sum of DC and the amplitude of AC must not exceed the U_R

Max permissible AC voltage U_{RMS}

If the working frequency is higher, the permissible AC voltage must be decreased, not to exceed the max. loss power of the capacitor.

Tolerance: $\pm 10\%$, 5% , other tolerance on request

Dissipation factor $Tg\delta$: $< 0,0004$ at 1kHz and $+25^\circ C$

Insulation resistance R_{is} : $30\ 000/C$ [$M\Omega$]

Operating temperature range: $-40 \div +85^\circ C$

Max permissible ambient temperature: $+70^\circ C$ on case

The highest permissible capacitor temperature at the hottest point of the case must not exceed $+85^\circ C$.

Test voltage between terminals:

Up for 10sec. at $+25^\circ C$ All capacitors are tested by the routine test by the producer

Protection against Overvoltages:

The capacitors are self-healing and regenerate themselves after occasional breakdowns. The capacitor remains fully functional after the breakdown.

Surge Voltage: U_p

If the Overvoltages exceed the permissible value above, the capacitor might have been destroyed.

Test voltage between terminals and case:

$3000V50Hz$, 1min. at $+25^\circ C$

Max. peak current I_p : $< C_R \times dU/dt$

Mounting of capacitors: Max. tightening torque

For M8 screw = $8Nm$

Related standards: IEC 60384 -1

Marking for purchase ordering, sample:

KPI313S 0,2 μF $\pm 10\%$ or $\pm 5\%$, 6000V DC

C_R [μF]*	U_R	U_{pMAX}	Dimensions **[mm]				dU/dt [$V/\mu sec$]	ESR [$m\Omega$] at 100kHz	ESR [$m\Omega$] at 200kHz
	[V]		D	L	d	H			
0,2	6000	6500	$50^{\pm 1}$	$60^{\pm 1}$	20	$77,5^{\pm 1}$	>13000	0,3	1,6

*Other capacity on request

Warning! The manufacturer is not responsible for any damages, caused by the improper installation and application. Before using the capacitor in any application, please, read carefully this technical data-sheet.