



CYLINDRICAL CAPACITORS FOR HIGH PULSE AND GTO APPLICATIONS

KPI 308G

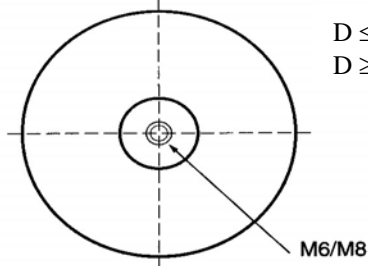

Dimensions:

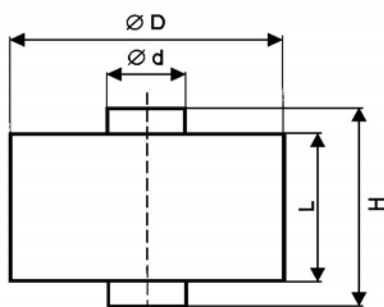

$D \leq 70$ M6 x 6
 $D \geq 80$ M8 x 8

Construction:

Metalized film electrodes with internal series connection. Non-inductive, self-healing construction, The windings are enclosed in a cylindrical plastic case, epoxy resin sealed, self-extinguishing, UL94-V0 Mechanical fixing and electrical contact are made by threaded holes M6 or M8 on the facing of the case.

Applications:

The capacitors are suitable to withstand high peak current loading as in protection of GTO, High ripple current filtering, high frequency induction heating... The axial construction minimizes the series inductance, have very low series resistance and good thermal dissipation of heat.

Technical data

Rated voltage U_R Rated voltage is the max. DC or peak voltage, for which the capacitor is designed.

If the capacitor works with the DC and also super-imposed AC voltage U_{AC} , the sum of DC and the amplitude of AC must not exceed the U_R

Max permissible AC voltage U_{RMS} 50/60Hz,

If the working frequency is higher, the permissible AC voltage must be decreased, not to exceed the max. loss power of the capacitor.

Tolerance: $\pm 10\%$, 5%, other tolerance on request

Dissipation factor $Tg\delta$: $< 0,0005$ at 1kHz and $+25^\circ\text{C}$

Insulation resistance R_{IS} : 30 000/C [$M\Omega$]

Operating temperature range: $-40 \div +85^\circ\text{C}$

Max permissible ambient temperature: $+70^\circ\text{C}$ on case

The highest permissible capacitor temperature at the hottest point of the case must not exceed $+85^\circ\text{C}$.

Test voltage between terminals:

$1,6xU_R$, 2sec. at $+25^\circ\text{C}$ All capacitors are tested by the routine test by the producer

Protection against Overvoltages:

The capacitors are self-healing and regenerate themselves after occasional breakdowns. The capacitor remains fully functional after the breakdown.

Non Recurrent Surge Voltage: U_{PK}

If the Overvoltages exceed the permissible value above, the capacitor might have been destroyed.

Test voltage between terminals and case:

3000VDC, 1min. at $+25^\circ\text{C}$

Max. peak current I_p : $< C_R \times dU/dt$

Related standards: IEC 60384-1

Marking for purchase ordering, sample:

KPI308G 1,5 $\mu\text{F} \pm 5\%$ 1500V DC

*Other capacitance on request

C_R [μF]*	U_R	U_T	U_{RMS}	Dimensions ⁺¹ [mm]				dU/dt V/us	I_{RMS} [A]
	[V]	[V]	[V]	D	L	d	H		
1,0	1500	1700	700	55	50	20	L+4	400	40
1,5	1500	1700	700	55	50	20	L+4	400	50
2,0	1500	1700	700	85	50	20	L+10	400	60
3,0	1500	1700	700	85	50	20	L+10	350	70
4,0	1500	1700	700	85	50	20	L+10	300	75
5,0	1500	1700	700	85	50	20	L+10	200	80
10	1500	1700	700	115	50	20	L+10	200	80
12	1500	1700	700	115	50	20	L+10	200	100

Warning! The manufacturer is not responsible for any damages, caused by the improper installation and application. Before using the capacitor in any application, please, read carefully this technical data-sheet.