


**Radiointerference suppression capacitors class X1
C 338 OR 275VAC**

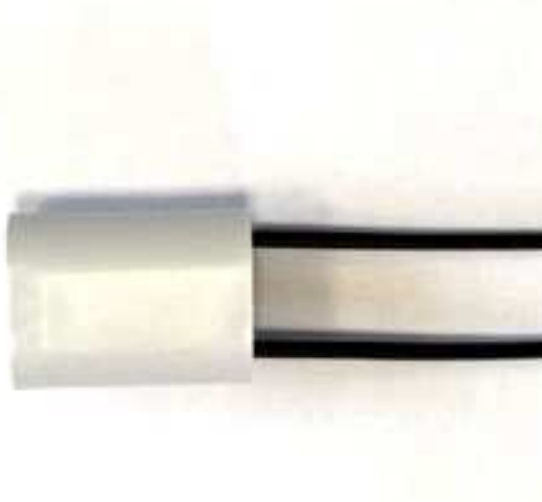

Construction:

Metallized polypropylene film capacitors noninductive type. Self - healing ability. Plastic case, epoxy resin sealed, flame retards case (UL 94 V-0) The Capacitor include the discharging resistor 1MΩ The leads: tined cooper wire or insulated stranded wire, the length on request – see the table

Reference standards:

IEC 60384 -14, EN 60384 - 14

THE ESČ MARK – the CZ certificate of the product safety and reliability



Rated voltage: 275V50/60 Hz

Rated capacitance: 0,2uF ÷ 3,3uF

Tolerance: ±20% (M) ±10 % (K)

Class: X1

Climatic category: 55/85/56

according to IEC 60068 - 1

Temperature range: -55°C ÷ +85°C

Dielectric loss at 1 kHz: 0,001

Insulation resistance:

Ris > 30 000/C MΩ/uF at 20°C, Um= 100 VDC after 1 min charging

Test voltage between the leads: 2xUR+1500V other tests in accordance to IEC 60384-14



Test voltage between the connected leads and the surface of the box: 3000V/50Hz 1 min.

Marking for purchase ordering:

C338OR 0,2uF ±10% R 1MΩ, 275V 50/60Hz

Dimensions:

INFO

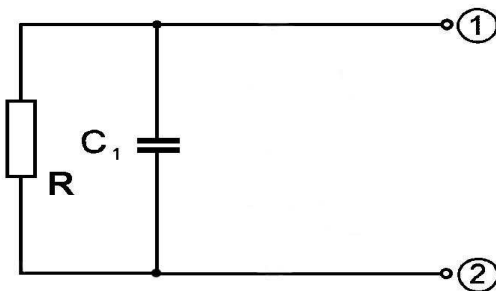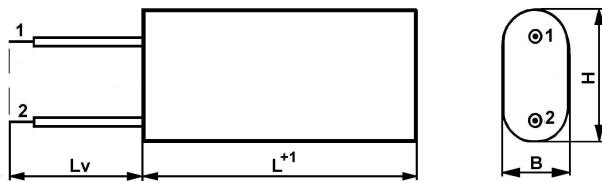

CR[uF]*	Dimensions +1[mm]				
	B	H	L	p	Lv
0,2	23	13	32		150**

*Other capacity on request ** Other Lv on request

Warning! The manufacturer is not responsible for any damages, caused by the improper installation and application. Before using the capacitor in any application, pleas, read carefully this technical data-sheet.