





Radiointerference suppression capacitors class X1

C 338R 305VAC

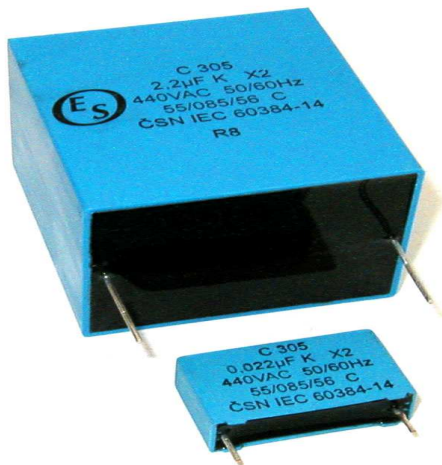

INFORMATIVE

Dimensions:

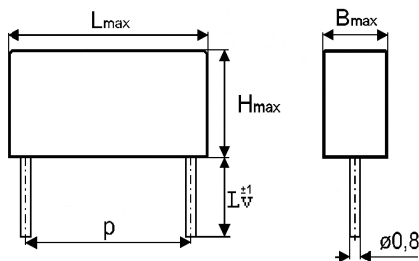

C _R [uF]*	Dimensions [†] [mm]				
	B	H	L	p	L _v
1,5	22	37	32	27,5	7**
3,3	30	45	43	27,5	7**

*Other capacity on request

** Other L_v on request

Construction:

Metallized polypropylene film capacitors noninductive type.
Self - healing ability. Rectangular plastic case, epoxy resin sealed, flame retards case (UL 94 V-0)
The leads: on request – see the picture

Reference standards:

IEC 60384 -14, EN 60384 - 14

THE ESČ MARK – the CZ certificate of the product safety and reliability



Rated voltage: 305V50/60 Hz

Rated capacitance: 22nF ÷ 3,3uF

Tolerance: ±20% (M) ±10 % (K)

Class: X1Y2

Climatic category: 55/85/56

according to IEC 60068 - 1

Temperature range: -55°C ÷ +85°C

Dielectric loss at 1 kHz: 0,001

Insulation resistance:

R_{is} > 30 000/C MΩ/uF at 20°C,

U_m= 100 VDC after 1 min charging

Test voltage between the leads: 2xU_R+1500V

other tests in accordance to IEC 60384-14

Test voltage between the connected leads

and the surface of the box: 4000V/50Hz 1 min.

Marking for purchase ordering:

C338R 3,3uF ±10% 305V 50/60Hz

Warning! The manufacturer is not responsible for any damages, caused by the improper installation and application. Before using the capacitor in any application, pleas, read carefully this technical data-sheet.