




2C100-025 Double Radio-interference suppression capacitors

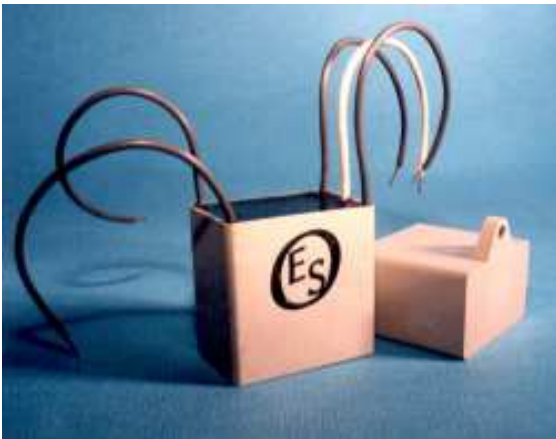

Informative

Construction:

Metallized polypropylene film capacitors noninductive type. Self - healing ability. Special plastic case with mounting clmp, epoxy resin sealed, Stranded wire leads 0,75mm², the length and colour of of insulation on request. Conclusion of the leads on request available flame retards case (UL 94 V-0)

Reference standards:

EN 60384-16
Certificate: by IECCE-CB CZ1162 and ESC 2010074

Rated voltage: 160V DC

Rated capacity: 2x6,6uF
other capacity on request available

Tolerance: ±20% (M) ±10 % (K)

Climatic category: 40/100/56
according to IEC 60068 – 1

Temperature range: -40°C ÷ +100°C

Dielectric loss at 100Hz: 0,001

Insulation resistance:


Ris > 10GΩ at 20°C,
Um= 100 VDC after 1 min charging

Test voltage between the leads: 200VDC 2sec
other tests in accordance to IEC 60384-16.


Marking for purchase ordering:

2C100-025 2x6,6 uF ±10% 160VDC


Warning! The manufacturer is not responsible for any damages, caused by the improper installation and application. Before using the capacitor in any application, pleas, read carefully this technical data-sheet.

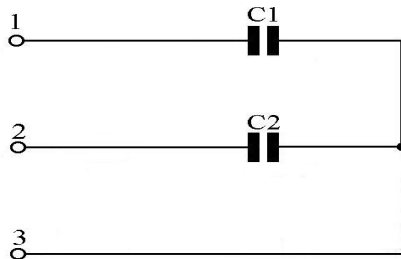

Variante 1

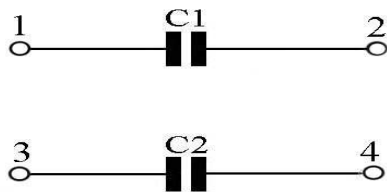

Variante 2

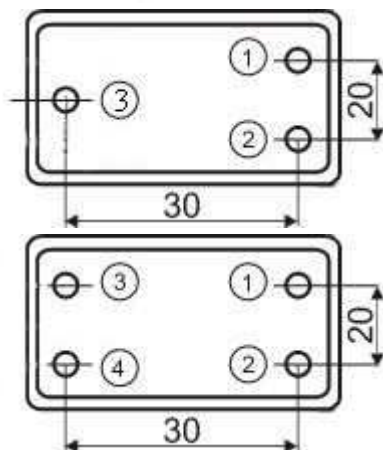

Variante 1

Variante 2