


HIGH VOLTAGE CAPACITORS MKP500-092

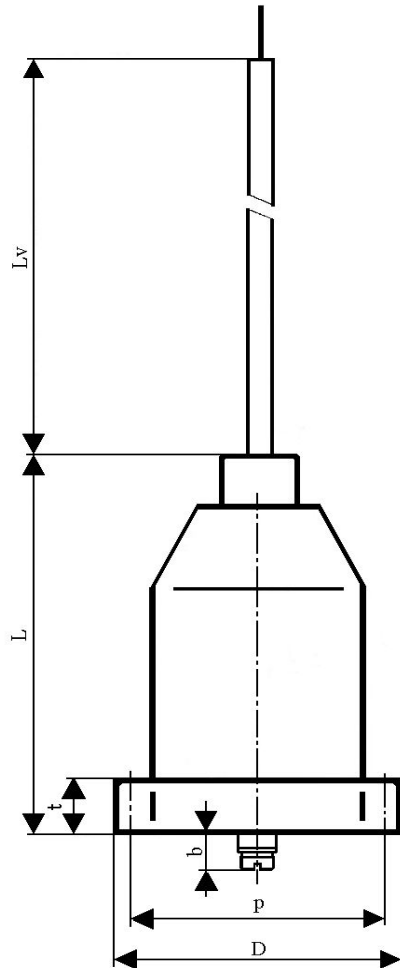

Construction:

Metallized polypropylene-film dielectric, non-inductive, self-healing construction Plastic cylindrical flame retardant case, with HV cable-lead and bottom screw.

Applications:

High voltage AC applications

Technical data

Rated voltage U_R: 20 kV DC

Rated voltage is the max. DC or peak voltage, for which the capacitor is designed. If the capacitor works with the DC and also super-imposed AC voltage U_{AC}, the sum of DC and the amplitude of AC must not exceed the U_R

Max permissible AC voltage: 12 kV 50/60Hz

Rated capacitance: 500-560pF

Tolerance: ±10%,

Dissipation factor Tgδ: < 0,01 at 1kHz and +25°C

Insulation resistance R_{IS}: >2000MΩ

Operating temperature range: -40 ÷ +70°C

The highest permissible capacitor temperature at the hottest point of the case must not exceed +70°C.

Test voltage between terminals: 22 kV DC, 1min. at +25°C, all capacitors are tested by the routine test by the producer

Permitted over voltages in working conditions:

1,1 x U_R for 2 sec.

If the over voltages exceed the permissible values above, the capacitor might have been destroyed.

Test voltage between terminals and case:

22 000VDC, 1min. at +25°C

Max. repetitive rate of voltage rise dU/dt:

< 1V/usec at U_R and +25°C

Max. peak current I_p: < C_R x dU/dt

Related standards: IEC 60384-1

Marking for purchase ordering:

MKP500-092 500pF 12 kV 50Hz /20kVDC

C [pF]	Dimensions [mm]					
	D	L	p	b	t	Lv
500	86,5	130	77,5	5	14,5	700

Warning! The manufacturer is not responsible for any damages, caused by the improper installation and application. Before using the capacitor in any application, please, read carefully this technical data-sheet.